

2MP, TDN, DWDR, IR, WI-FI, COVERT DOORBELL CAM



Doorbell Camera




IPDB22

- > Crystal-Clear Video Quality with 2MP Resolution
- > Super-Efficient H.265 Video Compression for Drastically Reduced Bandwidth and Storage Requirements
- > 2.0mm Wide Angle Fixed Lens
- > IR LED Light for 0 Lux Night Time Operation up to 16 Feet
- > TRUE Day/Night and D-WDR functionality for all Lighting Conditions
- > Wireless Video Transmission with Frequency Range of 2.4GHz ~ 2.4835GHz
- > Two-way Audio with Instantaneous Alert & Answer
- > 24VAC & 12VDC Power Options
- > IP65 Weather Resistant Housing
- > Built-in Micro-SD Card Slot enables local storage up to 128GB
- > Mounting Brackets & Hardware Included
- > Supported by uniview tec EZLive Mobile App for iPhone and Android Devices

Specifications

| Camera | |
|----------------------------------|--|
| Sensor | Progressive scan , 2 megapixel, CMOS |
| Lens / Angle of View (H x V) | 2.0mm @ F2.0 / 160° x 83° |
| Minimum Illumination | Color: 0.02 Lux (F2.0, AGC ON); 0 Lux with IR |
| Day/Night | IR-cut filter with auto switch (ICR) |
| IR LED Range | Up to 5m (16 ft) IR range |
| WDR | Digital |
| Video Compression | H.265, H.264 |
| Maximum Frame Rate / Stream | Main: 2MP (1920 x 1080) @ 25fps Sub: 720P (720 x 576) @ 25fps |
| Motion Detection | Supported |
| Wi-Fi | |
| Standard | IEEE802.11b/g/n |
| Frequency Range | 2.4GHz ~ 2.4835GHz |
| General | |
| Built-In Mic | Supported |
| Built-In Speaker | Supported |
| Audio Compression / Sampling | G.711 / 8kHz |
| Reset & Call Button | Supported |
| Power | 24VAC & 12VDC; Power consumption: Max 5.5W |
| Local Storage | Micro-SD, up to 128GB |
| Dimensions (L x W x H) & Weight | 46.8 x 23.5 x 123.2mm (1.8 x 0.9 x 4.9"); 0.1kg (0.22lb) |
| Operating Temperature & Humidity | -30°C ~ +50°C (-22°F ~ 122°F); Humidity: 10%~ 95% RH (non-condensing) |
| Conformity Certifications | IP65, CE, FCC |

Dimensions

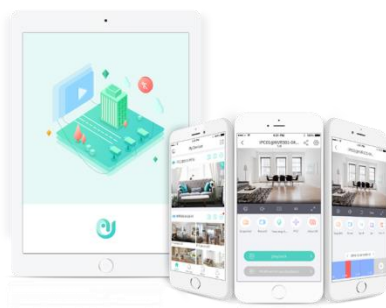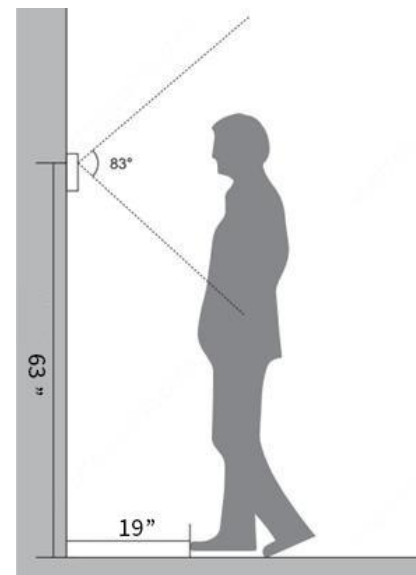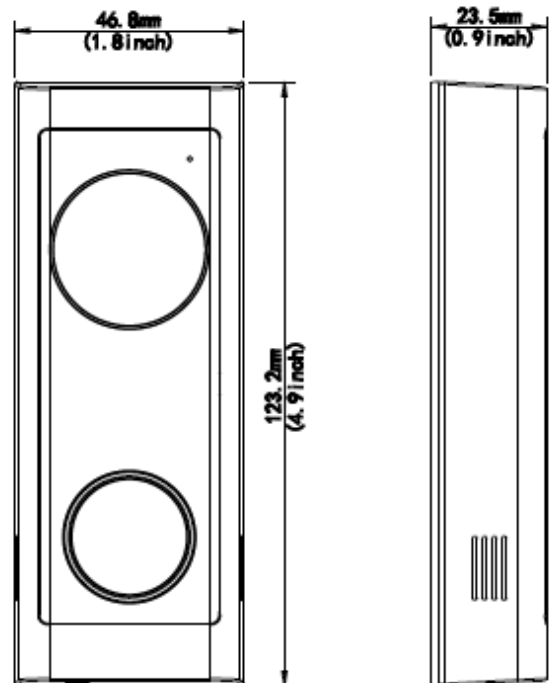

EZLive Mobile App for Doorbell Camera