

4ch Analog x 2ch IP, 8MP Resolution, Hybrid NVR



4 x 2 Hybrid NVR


HNRX04

- > 4 analog x 2 IP Cameras, Hybrid Network Recorder with H.265 Compression
- > Simultaneously supports 4 Analog (AHD, TVI, CVI and CVBS) and 2 IP Video Inputs with adaptive access (or up to 6 IP channels when analog cameras are not connected)
- > Supports High Definition Analog (HD Analog) over Coax Technology for use of Existing Coax Cables & BNC Connectors
- > Allows mega-pixel video images from AHD, TVI and CVI cameras without any rewiring
- > Supports recording of up to 8MP, 2592 x 1944 Resolution Images
- > Concurrent Mirrored Display on HDMI and VGA Monitor Outputs
- > HDMI and VGA display resolution up to 1920 x 1080
- > Supports Two-Way Audio and PTZ Camera Control
- > Easy Plug and Play Functionality with Automatic Device Discovery and Display
- > Supports 1 SATA HDD up to 10TB
- > ONVIF Profile S Compliant for IP Cameras
- > Long transmission distance over RG6U coax cable up to 2000ft (600m)
- > Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices

Specifications

Video	
Analog Camera Inputs	4 channels
IP Camera Inputs	2 channels (6ch if analog cameras not connected)
Video Compression	H.265
Max. Recording Video Resolutions	AHD - 8MP; TVI - 8MP; CVI- 8MP CVBS - 960H (720TVL); IP - 8MP
Playback Video Capability (fps)	Analog & IP Cameras: 4 x 4MP @30 IP Cameras Only: 4 x 4MP @30
Monitor Output	1 x HDMI (1080p~ 720p); 1 x VGA (1080p ~ 720P)
Synchronous Playback	4 channels
Network	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Bandwidth	Incoming – 48Mbps; Outgoing – 60Mbps
Remote Users	128
Video Analytics	Behavior Search, Intrusion detection and Cross Line detection on analog camera, 1-ch only
General	
Network Interface	1 – RJ45, 10M/100M, self-adaptive Ethernet
Serial Interface	1 x RS485 (Terminal Strip)
USB Interface	Rear panel: 2 x USB2.0
Audio I / O	1ch RCA Input / 1ch RCA Output
Hard Disk	1 SATA, up to 10TB
Power	12VDC; 8W Consumption (w/o HDD)
Operating Temperature	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (WxDxH)	260 × 240 × 44mm (10.2 × 9.4 × 1.7")
Weight (w/o HDD)	1.1kg (2.43lb)
Conformity Certifications	FCC, CE (UL – Power Supply only)

Dimensions

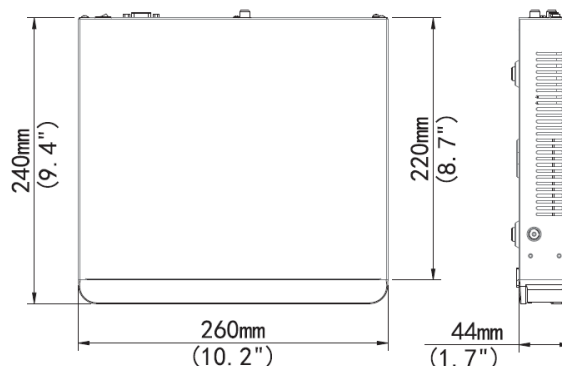

Accessories

- 4KTESTMON Multi-Function Video Test Monitor
- NSW081P 8-Port PoE Switch

Models

- HNRX04-1T
- HNRX04-2T
- HNRX04-4T

Rear Panel View

