

8ch Analog x 4ch IP, 8MP Resolution, Hybrid NVR



8 x 4 Hybrid NVR


HNRX08

- > 8 analog x 4 IP Cameras, Hybrid network recorder with H.265 Compression
- > Simultaneously supports 8 Analog (AHD, TVI, CVI and CVBS) and 4 IP Video Inputs with adaptive access (or up to 12 IP channels if no analog cameras are connected)
- > Supports High Definition Analog (HD Analog) over Coax Technology for use of Existing Coax Cables & BNC Connectors, allowing mega-pixel video images from AHD, TVI and CVI camera without any rewiring
- > Supports recording of up to 8MP (4K), 3840 x 2160 Resolution Images
- > Concurrent Mirrored Display on HDMI and VGA Monitor Outputs
- > HDMI display resolution up to 8MP - 3840 x 2160
- > Supports Audio I/O and PTZ Camera control
- > Easy Plug and Play Functionality with Automatic Device Discovery and Display
- > Supports 2 SATA HDD up to 10TB each for 20TB total
- > ONVIF Profile S Compliant for IP Cameras
- > Long transmission distance over RG-6 coax cable up to 2000ft (600m)
- > Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices

Specifications

Video	
Analog Camera Inputs	8 channels
IP Camera Inputs	4 channels (up to 12ch if no analog connected)
Video Compression	H.265, H.264
Max. Recording Video Capability (fps)	AHD, TVI: 8MP @ 15; 5MP @ 20; 4MP @ 30; 3MP @ 30 (channels 1-2 only); 2MP @ 30; 720p @ 30 CVI: 8MP @ 15; 5MP @ 20; 4MP @ 20; 2MP @ 30; 720p @ 30 CVBS - 960H (720TVL) IP - 8MP
Playback Video Capability (fps)	1 x 8MP @ 30; 1 x 6MP @ 30; 1 x 5MP @ 30; 2 x 4MP @ 30; 2 x 3MP @ 30; 3 x 3MP @ 25; 4 x 1080p @ 30; 8 x 720P @ 30
Monitor Output	1 x HDMI, 2160p; 1 x VGA, 1080p; 1 x CVBS
Synchronous Playback	8 channels
Network	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Bandwidth	Incoming – 56Mbps; Outgoing – 64Mbps
Remote Users	128
General	
Network Interface	1 x RJ45, 10M/100M/1000M, self-adaptive Ether.
USB Interface	Front panel: 1 x USB2.0; Rear panel: 1 x USB2.0
Serial Interface	1 x RS485, Terminal Strip
Audio I / O	1ch / 1ch, RCA
Hard Disk	2 SATA, up to 10TB each
Power	12VDC; 8W Consumption (w/o HDD)
Operating Temperature	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Rack Mountable	Yes; see Accessories
Dimensions (WxDxH)	380 × 315 × 53mm (15 × 12.4 × 1.9")
Weight (w/o HDD)	1.9 Kg (4.19lb)
RG-6 Coax Cable Transmission	Up to 1200ft w/ TVI, CVI; up to 2000ft w/ AHD
Conformity Certifications	FCC, CE (UL – Power Supply only)

Dimensions

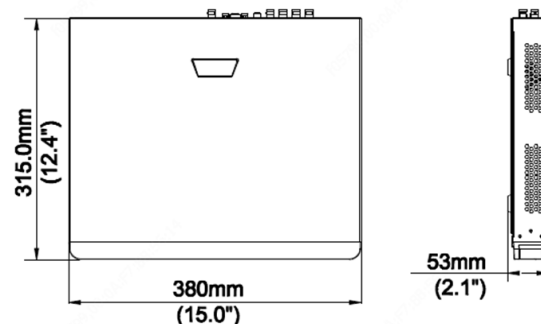

Accessories

4KTESTMON	Multi-Function Video Test Monitor
XDLBB2	Recorder Lockbox
NSW081P	8-Port PoE Switch
NSW162P	16-Port PoE Switch
RCKERS1	Rack Ears

Models

HNRX08-2T	HNRX08-4T
HNRX08-8T	HNRX08-16T