32ch, 16 PoE, 4K Resolution, 4-bay HDD, H.265 NVR





32ch NVR **NR32XP**

- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > 32ch network recorder with H.265 Compression for Best-in-Class Recording and Storage Performance
- > Embedded PoE Switch for 16 Channels Up to 240W
- > Supports recording of up to 4K (3840 x 2160) Resolution Images
- > Display 4K (3840 x 2160) Resolution Images on HDMI Output
- > Concurrent Mirrored Display on HDMI and VGA Monitor Outputs
- > ONVIF Profile Series Compliant
- > Easy Plug and Play Functionality with Automatic Device Discovery and Display
- > Supports 4 SATA HDD's up to 10TB each for 40TB total
- > Two way audio and Alarm I/O Support
- > Supports Cloud Upgrade for NVR and Cameras, with Automatic Detection of Latest Firmware and Upgrades
- > Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices
- > Long Range PoE Capability, up to 250M (825ft) with Cat5E or Cat6




NR32XP NVR

Network Recorders

Specifications

Video		
IP Camera Inputs	32 channels	
Video Formats	Ultra 265, H.265, H.264	
Recording Video Resolution	4K (8MP) Maximum	
Playback Video Capability (fps)	2 x 4K @ 30; 4 x 4MP @ 30; 5 x 3MP @ 30; 8 x 1080P @ 30; 16 x 720P @ 30; 32 x D1 @ 30	
Monitor Output	HDMI (4K~ 720p); VGA (1080p ~ 720P)	
Synchronous Playback	32 channels	
Network		
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
Bandwidth	Incoming – 160Mbps Outgoing – 64Mbps	
Remote Users	128	
General		
Network Interface	1 – RJ45, 10M/100M/1000M, Self-adaptive Ethernet	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0	
Alarm Interface	16ch – Inputs; 4ch - Output	
PoE Interface	16 – 100Mbps RJ45 ports; IEEE 802.3af/at; Max 30W single port, w/ Max 200W total	
Audio Interface	1ch RCA Input / Output	
Corridor Mode	Record / Playback Multiple Cameras Simultaneously	
Hard Disk	4 SATA, up to 10TB each: total 40TB	
Power	100-240VAC; 15W Consumption (w/o HDD)	
Operating Temperature	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)	
Rack Mountable	Yes; rack ears are included	
Dimensions (WxDxH)	400 × 362 × 74mm (15.7 × 14.2 × 2.9")	
Weight (w/o HDD)	5kg (11.02lb)	
Conformity Certifications	FCC, CE (UL – Power Supply only)	

Dimensions

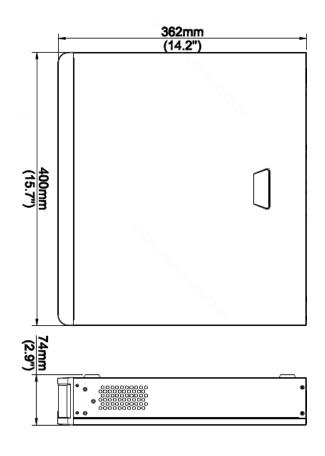

Accessories

LB3L	NVR Lockbox
NSW162P	16-port PoE Switch

Models

NR32XP-8T	NR32XP-16T
NR32XP-24T	NR32XP-32T
NR32XP-40T	



Uniview Technology / 850 Freeport Pkwy, Ste. 100, Coppell, TX 75019 Toll Free: 888-288-7644 / Main 972-459-8645 / Fax 972-459-8661 ©2022 uniview tec All rights reserved. Specifications and Design are subject to change without notice. UVT4200321-02