4ch, 4 PoE, 4K Resolution, H.265 NVR





4ch NVR **NR04XP**

- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > 4ch network recorder with H.265 Compression for Best-in-Class Recording and Storage Capability
- > Supports 1 SATA HDD up to 8TB and has Embedded PoE Switch for all Video Channels
- > Supports recording of up to 4K (8MP), 3840 x 2160 Resolution Images
- > Display Images up to 4K (8MP) Resolution on HDMI Output
- > Concurrent Mirrored Display on HDMI and VGA Monitor Outputs
- > Easy Plug and Play Functionality with Automatic Device Discovery and Display
- > Supports Cloud Upgrade for NVR and Cameras, with Automatic Detection of Latest Firmware and Upgrades, and is ONVIF Profile S, G and T Compliant
- Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices




NR04XP 4ch NVR

Network Recorders

Specifications


| Video | |
|---------------------------------|---|
| IP Camera Inputs | 4 channels |
| Video Formats | Ultra 265, H.265, H.264 |
| Recording Video Resolution | 4K (8MP), 3840 x 2160 Maximum |
| Playback Video Capability (fps) | 1 x 4K @ 30, 4 x 5MP @ 25, 4 x 4MP @ 25, 4 x 3MP @ 25, 4 x 1080p @ 30 |
| Monitor Output | 1 x HDMI (4K~ 720p); 1 x VGA (1080p ~ 720p) |
| Synchronous Playback | 4 channels |
| Network | |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP |
| Bandwidth | Incoming – 64Mbps; Outgoing – 48Mbps |
| Remote Users | 128 |
| General Alarm | Motion, Tampering, Human Body Detection, Video Loss, Alarm Input |
| General | |
| Network Interface | 1 – RJ45, 10M/100M, self-adaptive Ethernet |
| USB Interface | Rear panel: 2 x USB2.0 |
| PoE Interface | 4 – 100Mbps RJ45 ports; IEEE 802.3af/at; Max 30W single port, w/ Max 54W total |
| Audio Interface | 1ch RCA Output |
| Hard Disk | 1 SATA, up to 8TB |
| Power | 48VDC; 9W Consumption (w/o HDD) |
| Operating Temperature | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity \leq 90% RH(non-condensing) |
| Dimensions (WxDxH) | 205 × 205 × 46mm (8.1 × 8.1 × 1.8") |
| Weight (w/o HDD) | 06kg (1.3lb) |
| Conformity Certifications | FCC, CE (UL – Power Supply only) |

Rear Panel

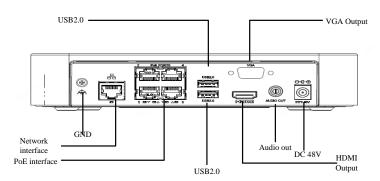

Uniview Technology / 850 Freeport Pkwy, Ste. 100, Coppell, TX 75019 Toll Free: 888-288-7644 / Main 972-459-8645 / Fax 972-459-8661 ©2022 univiewtec All rights reserved. Specifications and Design are subject to change without notice. UVT4300322-00

Dimensions



46 (1.8")

Accessories

| 50' CAT5E Cable w/ Connectors |
|--------------------------------|
| 100' CAT5E Cable w/ Connectors |
| 200' CAT6 Cable w/ Connectors |
| 300' CAT6 Cable w/ Connectors |
| Video Test Monitor |
| |

Models

NR04XP-1T

NR04XP-2T

