

## 32ch Analog x 4ch IP, 8MP Resolution, Hybrid NVR



32 x 4 Hybrid NVR

### **HNR322X**

- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > Hybrid network recorder supports recording of up to 8MP Resolution for HD Analog and IP Cameras with H.265 / H.264 Compression
- > Simultaneously supports 32 Analog (AHD, TVI, CVI and CVBS) and 4 IP Video Inputs with adaptive access (or up to 36 IP channels if no analog cameras are connected)
- > Supports High Definition Analog (HD Analog) over Coax Technology for use of Existing Coax Cables & BNC Connectors, allowing mega-pixel video images from AHD, TVI and CVI camera without any rewiring
- > Concurrent Mirrored Display on HDMI and VGA Monitor Outputs
- > HDMI display resolution up to 8MP
- > Supports Audio I/O and PTZ Camera control
- > Easy Plug and Play Functionality with Automatic Device Discovery and Display
- > Supports 2 SATA HDD up to 10TB each
- > ONVIF Profile S Compliant for IP Cameras
- > Long transmission distance over RG-6 coax cable up to 2000ft (600m)
- > Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices

[www.univiewtechnology.com](http://www.univiewtechnology.com)

## Specifications

Video & Audio Inputs	
Analog Video Input	32-ch, BNC
IP Video Input	4-ch (only IP up to 36ch); each channel up to 8MP
Supported Analog Camera Types	<p><b>Support AHD input:</b></p> <p>8MP @ 15fps                      5MP @ 20fps                      4MP @ 30fps                      1080P @ 30fps                      720P @ 30fps</p> <p><b>Support TVI input:</b></p> <p>8MP @ 15fps                      5MP @ 20fps                      4MP @ 30fps                      1080P @ 30fps                      720P @ 30fps</p> <p><b>Support CVI input:</b></p> <p>8MP @ 15fps                      5MP @ 25fps                      4MP @ 30fps                      1080P @ 30fps                      720P @ 30fps</p> <p><b>Support CVBS input</b></p>
Audio Input	1-ch, RCA
Audio Compression	G.711U
Video & Audio Outputs	
CVBS Output	1-ch, BNC
VGA Output	1920 x 1080p / 60Hz, 1920 x 1080p / 50Hz, 1600 x 1200 / 60Hz, 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, 1024 x 768 / 60Hz
HDMI Output	3840 x 2160 / 30Hz, 1920 x 1080p / 60Hz, 1920 x 1080p / 50Hz, 1600 x 1200 / 60Hz, 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, 1024 x 768 / 60Hz
Audio Output	1-ch, RCA
Synchronous Playback	16
Live view display	HDMI / VGA: 1 / 4 / 6 / 8 / 9 / 16 / 25 / 36
Two-way Audio	1-ch, RCA (Using the audio input and output)

Coaxial Cable		
Audio over cable	32-ch, One-way Audio (only for Uniview CVI protocol cameras)	
Snapshot		
FTP/Schedule/Event Snapshot	32-ch snapshot, up to 704 x 576 resolution	
Network		
Incoming Bandwidth	80Mbps (Up to 144Mbps after all analog channel conversion)	
Outgoing Bandwidth	160Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP	
Supported Browsers	IE(IE10/11) for Windows; Firefox (version 52.0 and above) for Windows; Chrome(version 45 and above) for Windows; Edge(version 79 and above) for Windows	
Encoding		
Recording Resolution	8MP Lite / 5MP Lite /4MP Lite / 1080P / 720P / CIF	
Recording Frame Rate	<b>Main stream</b>	<b>Sub stream</b>
	8MP Lite @ 8fps	D1 @ 8fps
	5MP Lite @ 12fps	D1 @ 12fps
	4MP Lite @ 15fps	D1 @ 15fps
	1080P @ 15fps	D1 @ 15fps
	720p @ 30fps	D1 @ 30fps
Audio Sample Rate	8KHz,16 bit per channel	
Audio Bit Rate	64Kbps per channel	
Decoding		
Capability (fps)	Analog: 16 x 8MP Lite @ 8, 16 x 5MP Lite @ 12, 16 x 4MP Lite @ 15, 16 x 1080P @ 15, 16 x 720P @ 30 IP: 16 x 720P @ 30, 8 x 1080P @ 30, 4 x 4MP @ 30, 2 x 8MP @ 30	
Hard Disk Drives		
SATA	2 SATA Interface	
Capacity	Up to 10TB for each HDD	
Smart Alarm		
Analog Smart by XVR	Ultra Motion Detection (UMD)	
IP Smart by IPC	Face Detection; Defocus Detection; Scene Change Detection; Object Removed; Object Left Behind; Auto Tracking	
VCA Search	Face Search; Behavior Search	

Smart Functions by XVR	16-ch (UMD)
<b>General Alarm</b>	
General Alarm	Motion detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
<b>External Interface</b>	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1 x USB2.0
Serial Interface	1 x RS485
Alarm In	4
Alarm Out	1
<b>General</b>	
Power Supply	12V DC; Power Consumption: ≤ 38W( without HDD )
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
Dimensions (W × D × H)	380 × 326 × 53mm (15 × 12.8 × 2.1")
Weight ( without HDD )	2.6Kg ( 5.72lb )
<b>General</b>	
Certifications	FCC, CE (UL – Power Supply only)

## Accessories


4KTESTMON1	Multi-Function Video Test Monitor
NSW08PX	8-Port PoE Switch
NSW162PX	16-Port PoE Switch
NSW242PX	24-Port PoE Switch
RCKERS2	Rack Ears

## Models

HNR322X-16T

HNR322X-24T

## Dimensions

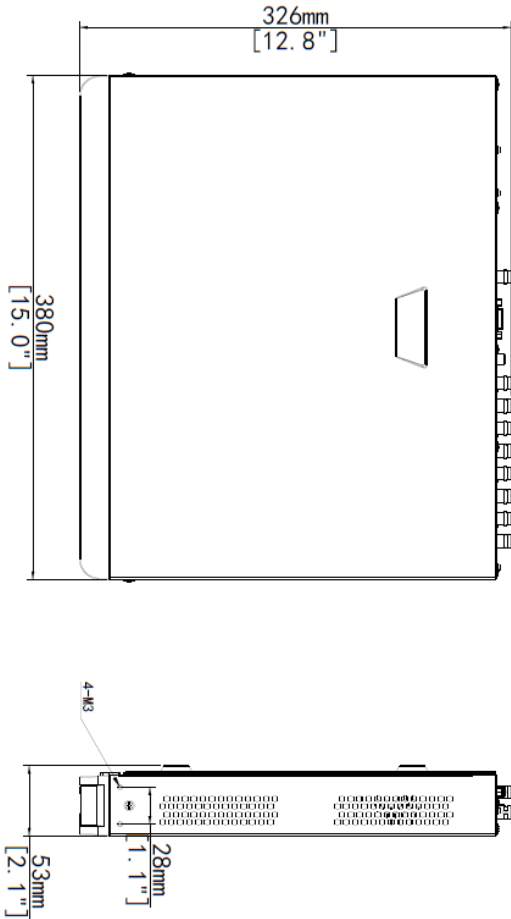

## Rear Panel

