

8MP, 180° MULTI-LENS, COLORHUNTER TURRET



180° Multi-Lens Turret

IPT4K180CAIX

- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > Exceptional Video Quality with 8MP, 4096 x 1860 Resolution
- > Super-Efficient H.265 Video Compression for Drastically Reduced Bandwidth and Storage Requirements
- > Powerful, Smart IR LED Lights for 0 Lux Night Time Operation up to 98 Feet
- > 2x 2.8mm, 180° Multi-Lens; ONVIF Profile S Compliant
- > TRUE Day/Night and WDR functionality for all Lighting Conditions
- > Dual Video Streams, Defog, Backlight Compensation and 3D DNR
- > Intelligent perimeter protection such as cross line and intrusion, with smart intrusion prevention technology for significantly reduced false alarms when focusing on humans and motor vehicles
- > PoE & 12VDC Power Options and Optional Mounts Available
- > Built-in Micro-SD Card Slot enables local storage up to 512GB
- > Two-way Audio, 3-way Axis, IP67 Weather Resistant Housing
- > Supported by uniview tec Guard Station, Guard Live and Guard Viewer App's for PC, Mac, iPhone and Android Devices

www.univiewtechnology.com

Specifications

Camera	Description
Max Resolution	8MP
Sensor	1/2.5" CMOS
Min. Illumination	Color: 0.0005 lux (F1.0, AGC ON); 0 Lux with IR on
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 ~ 1/100000s
Adjustment Angle	Pan: 0° ~ 360°, Tilt: 0° ~ 75°, Rotate: 0° ~ 360°
S/N	>52dB
WDR	130dB
Lens	Description
Focal Length	2.8 mm
Iris Type	Fixed
Iris	F1.0
Field of View (H)	180°
Field of View (V)	65°
Field of View (D)	180°
DORI	Description
DORI Distance(Lens)	2.8mm
DORI Distance(Detect)	63.1m(206.7t)
DORI Distance(Observe)	25.2m(82.7ft)
DORI Distance(Recognize)	12.6m(41.3ft)
DORI Distance(Identify)	6.3m(20.7ft)
Illuminator	Description
Supplemental Light	IR, Warm light
Illumination Distance(IR)	30 m (98.4 ft)
Wavelength	850 nm
IR & Warm Light On/Off Control	Auto/Manual
Video	Description
Video Compression	H.265; H.264; MJPEG
H.264 Code Profile	Baseline profile, Main profile, High profile
Frame Rate	Main: 8MP (4096*1860) @ 20fps Sub: 2048*936 @ 20fps
Video Bit Rate	128 Kbps ~ 16 Mbps
U-code	Support
Privacy Mask	Up to 4
OSD, ROI	Up to 8
Video Stream	Dual Streams

IPT4K180CAIX Turret

IP CAMERAS


Image	Description
Auto Scene Match (ASM)	Support (Only WDR)
White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	N/A
De-warping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Events	Description
Basic Detection	Cross Line (based on Human Body Detection); Intrusion (based on Human Body Detection); Enter Area; Leave Area; Motion Detection; Ultra Motion Detection; Tampering Alarm; Audio Detection
Statistical Analysis	People Counting; Support People Flow Counting and Crowd Density Monitoring
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP Authentication
Audio	Description
Audio Compression	G.711U; G.711A
Audio Bitrate	64 Kbps
Two-way Audio	Support
Suppression	Support
Sampling Rate	8 KHz
Storage	Description
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR; NAS (NFS)
Network	Description
Protocols	IPv4; IPv6; IGMP; ICMP; ARP; TCP; UDP; DHCP; PPPoE; RTP; RTSP; RTCP; RTMP; DNS; DDNS; NTP; FTP; UPnP; HTTP; HTTPS; SMTP; 802.1x; SNMP; QoS; SSL/TLS; SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T); API; SDK
User/Host	Up to 32 users. 3 user levels: administrator, common user and operator
Security	Password Protection; Strong Password; HTTPS Encryption; Export Operation Logs; Basic and Digest Authentication for RTSP; Digest Authentication for HTTP; TLS 1.2; WSSE and Digest Authentication for ONVIF
Client	Guard Live, Guard Viewer, Guard Station
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above

IPT4K180CAIX Turret

IP CAMERAS

Interface	Description
Audio I/O	1 Input: impedance 35kΩ; amplitude 2V [p-p]; 1 Output: impedance 600Ω; amplitude 2V [p-p]
Alarm I/O	1/1
Serial Port	N/A
Built-in Mic	Support x 2
Built-in Speaker	Support
WIFI	N/A
Network	1 x RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
Certification	Description
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1); CB (IEC 62368-1); UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);
Protection	IK10 (IEC 62262), IP67 (IEC 60529)
General	Description
Power	DC 12V±25%, PoE (IEEE 802.3af);
Power Interface	Ø 5.5 mm coaxial power plug
Dimensions	Φ128.7 x 109.9mm (Φ5.1" x 4.3")
Weight	0.86kg (1.9lb)
Material	Metal
Environment	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Reset Button	Support

Dimensions

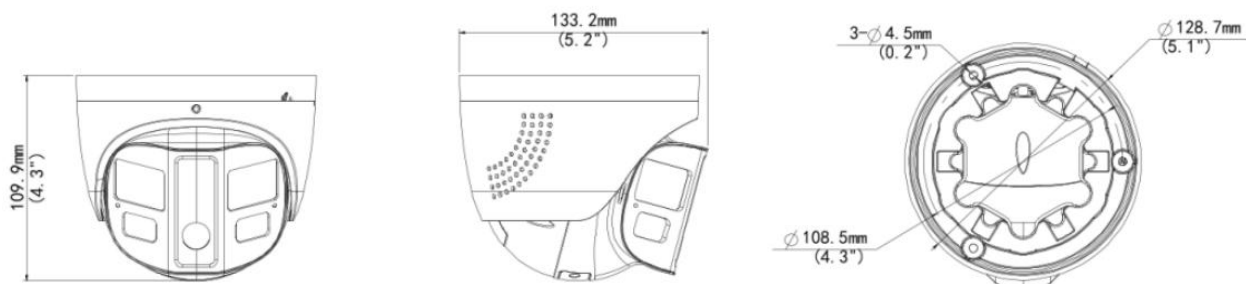

Accessories

See Camera Accessories Guide