

4MP, COLORHUNTER+ (Wise-ISP), WDR, AI, BULLET



Fixed Lens Bullet

IPB4WI28AIX

- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > ColorHunter+ (Wise-ISP) technology ensures ultra-high color image up to 0.0003 Lux
- > Exceptional Video Quality with 4MP, 2560 x 1440 Resolution
- > H.265 Video Compression for Drastically Reduced Bandwidth and Storage Requirements
- > Powerful White Light Operation up to 131 Feet
- > 2.8mm Fixed Lens; ONVIF Profile S Compliant
- > Exceptional Night Time Color Image and WDR functionality
- > Triple Video Streams, Built-in mic, Smart Illumination, Digital Defog and 3D DNR
- > Intelligent, smart intrusion prevention technology for significantly reduced false alarms when focusing on humans and motor vehicles; people counting & color retrieval
- > PoE & 12VDC Power Options and Optional Wall and Pendant Mounts Available
- > Built-in Micro-SD Card Slot enables local storage up to 512GB
- > 3-Way Axis, CE and IP67 Weather Resistant
- > Supported by uniview tec Guard Station Software, as well as Guard Live and Guard Viewer Mobile App's for iPhone and Android Devices

www.univiewtechnology.com


Specifications

Camera	
Max Resolution	4MP
Sensor	1/1.8" CMOS
Min. Illumination	Color : 0.0003 lux (F1.0, AGC ON)
Shutter	Auto/Manual, 1 ~ 1/100000s
Adjustment Angle	Pan: 0° ~ 360°, Tilt: 0° ~ 90°, Rotate: 0° ~ 360°
S/N	>56dB
WDR	130dB
Lens	
Focal Length	2.8mm
Iris Type	Fixed
Iris	F1.0
Field of View (H)	110.4°
Field of View (V)	60.5°
Field of View (D)	115.2°
DORI	
DORI Distance(Detect)	43.4 m (142.5 ft)
DORI Distance(Observe)	17.4 m (57.0 ft)
DORI Distance(Recognize)	8.7 m (28.5 ft)
DORI Distance(Identify)	4.3 m (14.3 ft)
Illuminator	
Illumination Distance(Warm Light)	40m (131.2ft)
Light On/Off Control	Auto/Manual
Video	
Video Compression	H.265; H.264; MJPEG
H.264 Code Profile	Baseline profile, Main profile, High profile
Frame Rate	<u>Main Stream:</u> 4MP (2560*1440) @30fps; 1080P @30fps; 720P @30fps; D1 (720*576) @30fps; 640*360 @30fps; 2CIF (704*288) @30fps; CIF (352*288) @30fps; <u>Sub Stream:</u> 1080P @30fps; 720P @30fps; D1 (720*576) @30fps; 640*360 @30fps; 2CIF (704*288) @30fps; CIF (352*288) @30fps; <u>Third Stream:</u> D1 (720*576) @30fps; 640*360 @30fps; 2CIF (704*288) @30fps; CIF (352*288) @30fps;
Video Bit Rate	128 Kbps ~ 16 Mbps
U-code	Support
OSD; Privacy Mask	8 OSD; 4 Privacy Mask
ROI	Support
Video Stream	Triple Streams

Image	
White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital Noise Reduction	2D/3D DNR
Smart Illumination	Support
Flip	Normal; Flip Vertical; Flip Horizontal; 180°; 90°Clockwise; 90°Anti-clockwise
HLC	Support
BLC	Support
Defog	Digital Defog
Intelligent	
Smart Intrusion Prevention	Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)
People Counting	Support people flow counting and crowd density monitoring
Attribute Collection	SIP with color retrieval
Events	
Basic Detection	Motion Detection; Ultra Motion Detection; Tampering Alarm; Audio Detection; Object Removed; Object Left Behind
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP Authentication, Alarm input, Alarm output
Audio	
Audio Compression	G.711U; G.711A
Audio Bitrate	64 Kbps
Two-way Audio	Support
Suppression	Support
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR; NAS (NFS)
Network	
Protocols	IPv4; IPv6; IGMP; ICMP; ARP; TCP; UDP; DHCP; PPPoE; RTP; RTSP; RTCP; DNS; DDNS; NTP; FTP; UPnP; HTTP; HTTPS; SMTP; 802.1x; SNMP; QoS; RTMP; SSL/TLS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T); API; SDK
User/Host	Up to 32 users, 3 user levels: administrator, common user and operator
Security	Password Protection; Strong Password; HTTPS Encryption; Export Operation Logs; Basic and digest authentication for RTSP; Digest authentication for HTTP; TLS 1.2; WSSE and digest authentication for ONVIF
Client	Guard Live, Guard Viewer, Guard Station
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Interface	
Audio I/O	1 Input: impedance 35 kΩ, amplitude 2 V [p-p], 1 Output: impedance 600 Ω, amplitude 2 V [p-p]

Alarm I/O	1/1
Built-in Mic	Support
Network	1 x RJ45 10M/100M Base-TX Ethernet
Certification	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1); UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1); CB (IEC 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529); IK10 (IEC 62262)
General	
Power	DC 12V±25%, PoE (IEEE 802.3af); Power consumption: Max 4.5W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions	265.2 × 95.2 × 82.9mm (10.4" × 3.7" × 3.3") (L x W x H)
Weight	0.89kg (1.96lb)
Material	Metal + Plastic
Environment	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Reset Button	Support

Dimensions

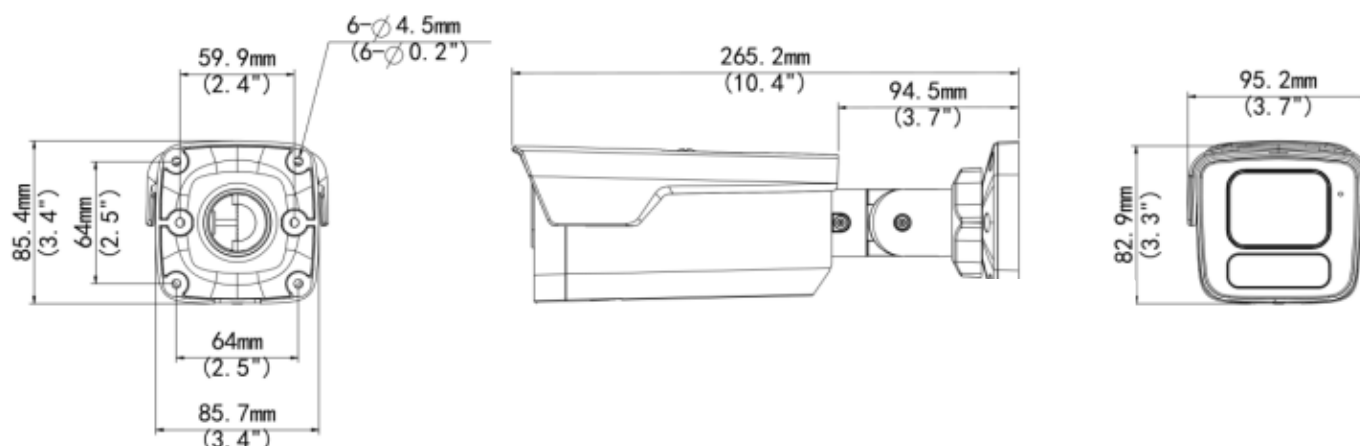

Accessories

See Camera Accessories Guide