

5MP, COLORHUNTER, WDR, IR, TURRET



Fixed Lens Turret

IPT5EC28X

- > Fully Adheres to National Defense Authorization Act (NDA) Guidelines
- > ColorHunter technology ensures ultra-high color image up to 0.01 Lux (F1.6, AGC ON)
- > Exceptional Video Quality with 5MP, 2880 x 1620 Resolution
- > Super-Efficient H.265 Video Compression for Drastically Reduced Bandwidth and Storage Requirements
- > Powerful, Smart IR LED Lights for 0Lux Nighttime Operation up to 98 Feet
- > 2.8mm Fixed Lens; ONVIF Profile S Compliant
- > TRUE Day/Night and WDR functionality for all Lighting Conditions
- > Dual Video Streams, Built-in mic, Digital Defog and 3D DNR
- > Intelligent, smart intrusion prevention technology for significantly reduced false alarms when focusing on humans and motor vehicles
- > PoE & 12VDC Power Options and Optional Wall and Pendant Mounts Available
- > Built-in Micro-SD Card Slot enables local storage up to 128GB
- > 3-Way Axis and IP67 Weather Resistant
- > Supported by Uniview tec Guard Station Software, as well as Guard Live and Guard Viewer Mobile App's for iPhone and Android Devices

www.univiewtechnology.com



UVT70461024-00

Specifications

Camera	Description
Resolution	5MP
Sensor	1/3.0" CMOS
Min. Illumination	Color: 0.01 lux (F1.6, AGC ON); 0 lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 ~ 1/100000s
Adjustment angle	Pan: 0° ~ 360°, Tilt: 0° ~ 80°, Rotate: 0° ~ 360°
S/N	>52dB
WDR	Digital
Lens	Description
Lens type	2.8mm
Iris Type	Fixed
Iris	F1.6
Field of View (H)	97.0°
Field of View (V)	52.2°
Field of View (D)	107.5°
DORI	Description
DORI Distance (Lens)	2.8mm
DORI Distance (Detect)	63.0m(206.7t)
DORI Distance (Observe)	25.2m(82.7ft)
DORI Distance (Recognize)	12.6m(41.3ft)
DORI Distance (Identify)	6.3m(20.7ft)
Illuminator	Description
Illumination Distance(IR)	30m
Illumination Distance(Light)	30m
Wavelength	850nm
IR On/Off Control	Auto/Manual
Video	Description
Video Compression	H.265; H.264; MJPEG
H.264 code profile	Baseline profile, Main profile, High profile
Frame Rate	Main: 5MP (2880*1620) @20fps; 4MP (2560*1440) @25fps; 3MP (2304*1296) @30fps; 1080P (1920*1080) @30fps; 720P (1280*720) @30fps Sub: D1 (720*576) @30; 640*360 @30; 2CIF(704*288) @30; CIF(352*288) @30
Video Bit Rate	128 Kbps~6144 Kbps
U-code	Support

IPT5EC28X Turret

IP CAMERAS

OSD, Privacy Mask	Up to 4
ROI	Up to 8 areas
Video stream	Dual streams
Image	Description
White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital noise reduction	2D/3D DNR
Smart IR	Support
Flip	Normal; Flip Vertical; Flip Horizontal; 180°; 90°Clockwise; 90°Anti-clockwise
De-warping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Events	Description
Basic Detection	Motion detection; Ultra motion detection; Tampering alarm; Audio detection, Human Body Detection
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP authentication
Audio	Description
Audio Compression	G.711U; G.711A
Audio Bitrate	64 Kbps
Two-way Audio	N/A
Suppression	Support
Sampling Rate	8KHZ
Storage	Description
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR; NAS(NFS)
Network	Description
Protocols	IPv4; IGMP; ICMP; ARP; TCP; UDP; DHCP; RTP; RTSP; RTCP; RTMP; DNS; DDNS; NTP; FTP; UPnP; HTTP; HTTPS; SMTP; QoS; SSL/TLS; SNMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T); API; SDK
User/Host	Up to 32 users, 2 user levels: administrator and common user
Security	Password protection; Strong password; HTTPS encryption; Export operation logs; Basic and digest authentication for RTSP; Digest authentication for HTTP; TLS 1.2; WSSE and digest authentication for ONVIF
Client	Guard Live, Guard Viewer, Guard Station
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Interface	Description

Uniview Technology / 850 Freeport Pkwy, Ste. 100, Coppell, TX 75019

Toll Free: 888-288-7644 / Main 972-459-8645 / Fax 972-459-8661

©2024 uniview tec All rights reserved. Specifications and Design are subject to change without notice.

UVT70461024-00




IPT5EC28X Turret

IP CAMERAS

Audio I/O	N/A
Alarm I/O	N/A
Serial Port	N/A
Built-in Mic	Support
Built-in Speaker	N/A
Network	1 * RJ45 10M/100M Base-TX Ethernet
Certification	Description
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1); UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);
Protection	IP67 (IEC 60529)
General	Description
Power	DC 12V±25%, PoE (IEEE 802.3af); Power consumption: Max 2.8W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions	Φ 126 x 93.6mm (Φ 5.0" x 3.7")
Weight	0.29kg (0.64lb)
Material	Metal + Plastic
Environment	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: ≤95% RH (non-condensing)
Surge protection	4KV
Reset button	N/A

Dimensions

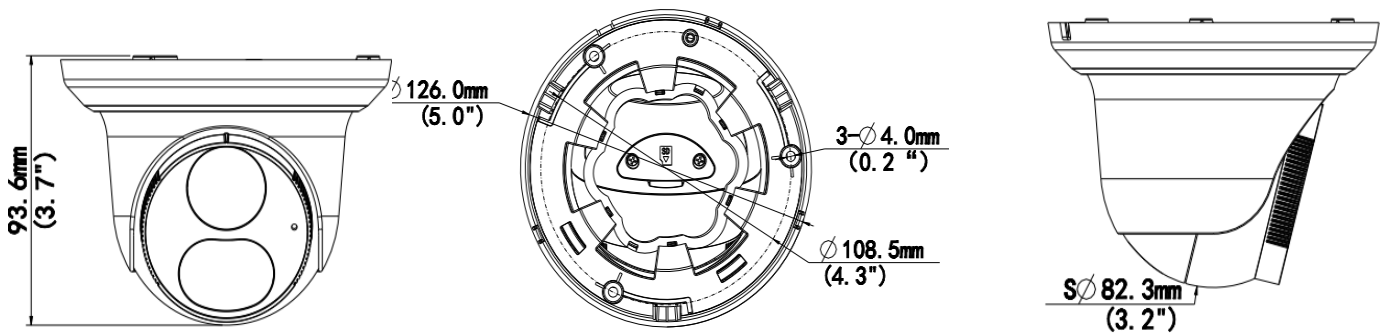

Accessories

See Camera Accessories List